

Dome LED

Ceiling Cord Mounted • Dry Location Listed **PROGRESS LED**

Description:

Dome Collection One-Light LED Pendant

Specifications:

- Antique Bronze, Painted Gold Inside Aluminum Shade
- White Acrylic Diffuser
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 5.1875 in W., 1.0625 in depth
- Mounting strap for outlet box included
- 120 in of wire supplied

Performance:

Number of Modules	1
Input Power	17 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1,211/71.2 (LM-82)
Lumens/LPW (Delivered)	662/40.4 (LM-79)
CCT	3000 K
CRI	90+ CRI
Life (hours)	60000 (L70/TM-21)
EMI/RFI	Meets FCC Title 47, Part 15 Class B
Max. Operating Temp	30 °C
Warranty	5-year Limited Warranty
Labels	cCSAus Dry Location Listed

P5341-2030K9




Dimensions:

Diameter: 16 in
 Height: 8-7/8 in
 Overall Ht. W/Cord: 129 in

Antique Bronze, Painted Gold Inside Aluminum Shade
 Diameter: 16 in

White Acrylic Diffuser
 Width: 5-13/16 in
 Height: 0-1/2 in

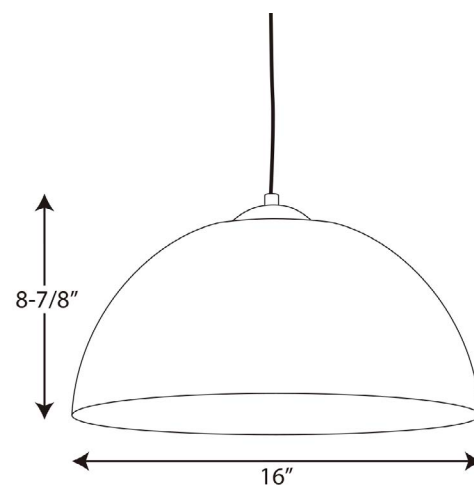

Photometrics:

ELECTRICAL DATA	P5341-2030K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Power Factor	Greater than 0.90
THD	<20%
EMI/RFI	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

P5341-2030K9

LED Light Engine: 3000 K 90+
 System Wattage: 17
 Fixture delivered lumens: 662
 Fixture Efficacy: 40.4
 Spacing Criteria: 1.2


P5341-2030K9

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	337	
5	336	32
15	317	89
25	280	129
35	240	150
45	194	148
55	106	93
65	9	16
75	4	4
85	1	1
90	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	250	37.7
0-40	400	60.4
0-60	641	96.7
0-90	662	100.0
90-180	0	0.0
0-180	662	100.0

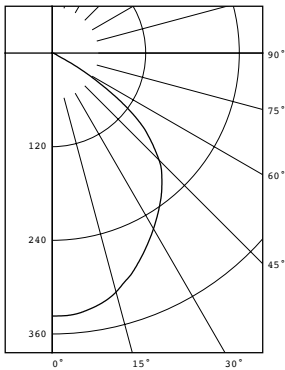

Test 16.00446 Test Date 02/24/16

P5341-2030K9

Dimming Notes:

P5341-2030K9 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron_Nova T NTELV-300

Lutron_Vierti VTELV-600

Lutron_Maestro MAELV-600

Lutron_spacer/system SPSELV-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.